

## Product information and test conditions

Name

Time 2019-02-18 02:37:48(Time-zone GMT+8)

Manufacturer


User Waveform Lighting  
(hello@waveformlighting.com)

Temperature(°C) Humidity(%) Distance(m)


## Parameters

CIE_x	0.3813
CIE_y	0.3782
CIE_u'	0.2251
CIE_v'	0.5024
CCT	3986 K
CRI (Ra)(R1~R8)	98
CQS	96
TLCI(Qa)	98
GAI	80
TM-30-15 Rf	95
TM-30-15 Rg	101
Illuminance	9,396 lux
Foot Candle	872.9 fc
$\lambda_p$	637 nm
Flicker Percentage	0 %
Flicker Index	0.00
Flicker Frequency	211 Hz


## Spectrum

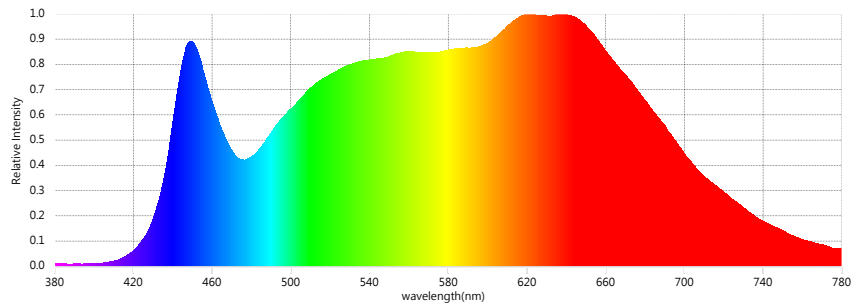


## CIE 1931

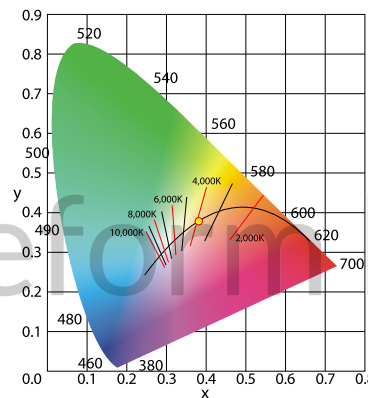


## CIE 1976

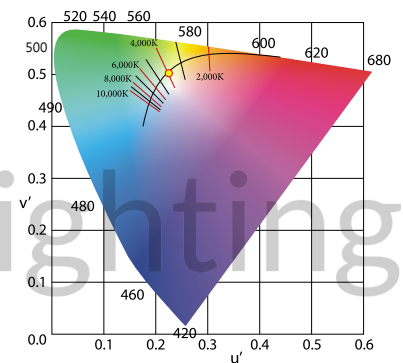

## C78.377 - 2017

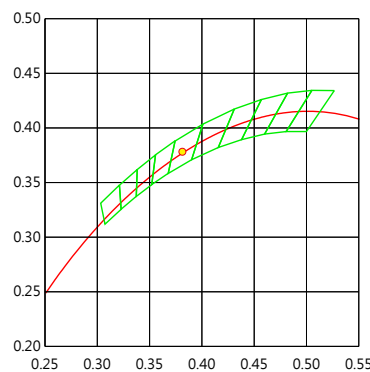

## IEC-SDCM

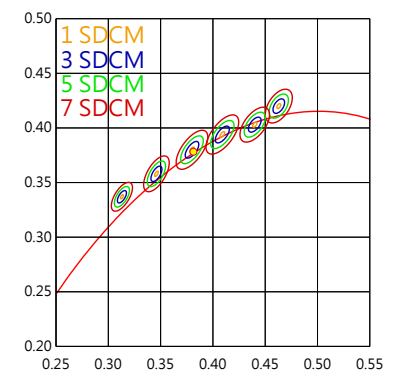

## CRI (Re) (R1-R15)

R1	99	R6	96	R11	97
R2	98	R7	98	R12	83
R3	95	R8	99	R13	99
R4	98	R9	95	R14	97
R5	98	R10	94	R15	98

## TM-30-15

