

## Product information and test conditions

Name

Time 2019-02-18 02:54:01(Time-zone GMT+8)

Manufacturer


User Waveform Lighting  
(hello@waveformlighting.com)

Temperature(°C) Humidity(%) Distance(m)


## Parameters

CIE_x	0.3476
CIE_y	0.3569
CIE_u'	0.2110
CIE_v'	0.4876
CCT	4926 K
CRI (Ra)(R1~R8)	97
CQS	96
TLCI(Qa)	99
GAI	90
TM-30-15 Rf	94
TM-30-15 Rg	101
Illuminance	10,113 lux
Foot Candle	939.6 fc
$\lambda_p$	448 nm
Flicker Percentage	0 %
Flicker Index	0.00
Flicker Frequency	199 Hz


## Spectrum

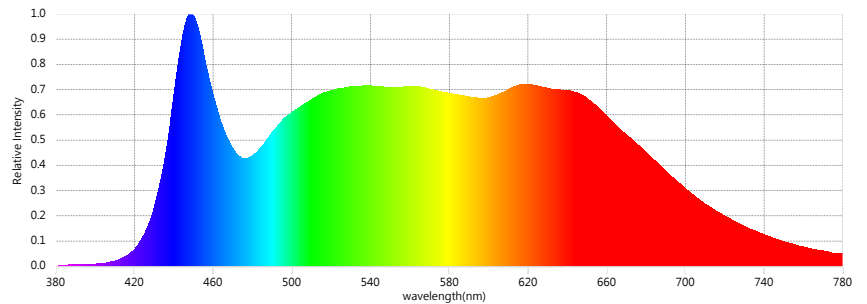


## CIE 1931

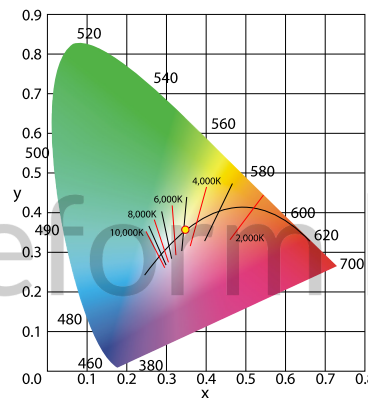


## CIE 1976

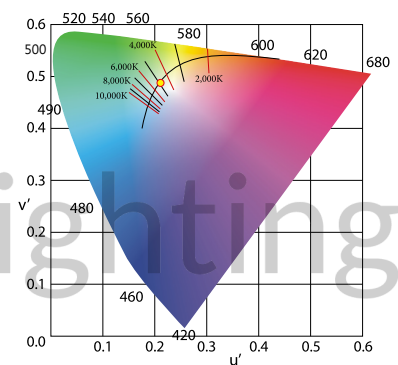

## C78.377 - 2017

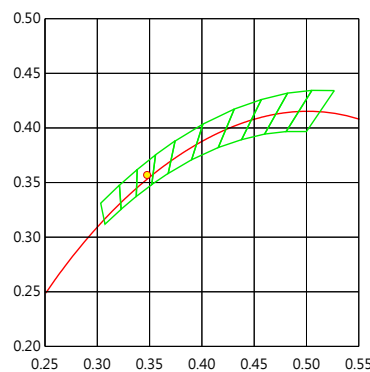

## IEC-SDCM

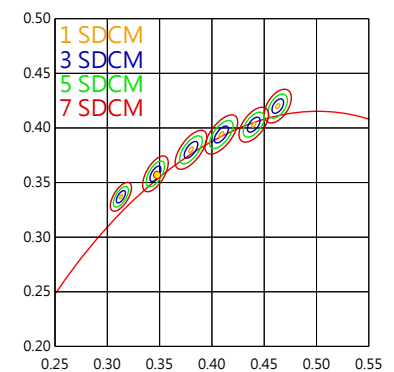

## CRI (Re) (R1-R15)

R1	97	R6	94	R11	96
R2	97	R7	98	R12	78
R3	95	R8	98	R13	97
R4	97	R9	92	R14	97
R5	96	R10	92	R15	97

## TM-30-15

