

Product information and test conditions

Name

Time 2019-02-18 03:02:25(Time-zone GMT+8)

Manufacturer


User Waveform Lighting
(hello@waveformlighting.com)

Temperature(°C) Humidity(%) Distance(m)


Parameters

CIE_x	0.3323
CIE_y	0.3422
CIE_u'	0.2063
CIE_v'	0.4781
CCT	5507 K
CRI (Ra)(R1~R8)	98
CQS	97
TLCI(Qa)	99
GAI	96
TM-30-15 Rf	95
TM-30-15 Rg	102
Illuminance	9,392 lux
Foot Candle	872.5 fc
λ_p	449 nm
Flicker Percentage	0 %
Flicker Index	0.00
Flicker Frequency	104 Hz


Spectrum

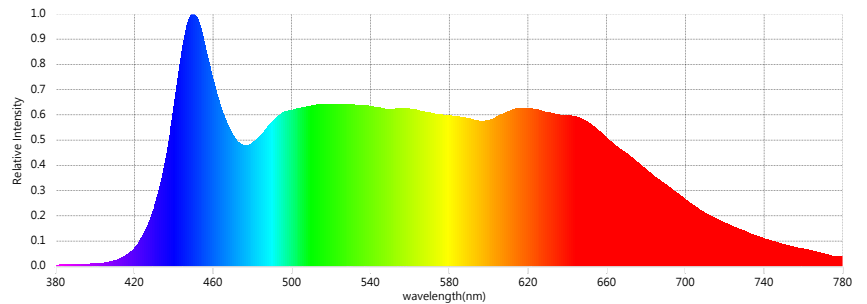


CIE 1931

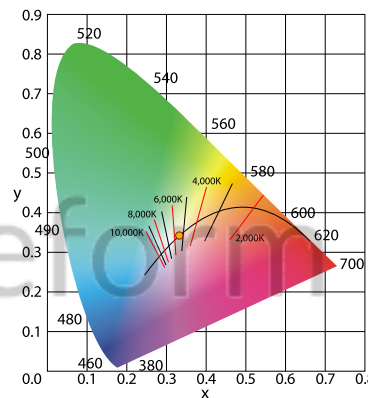


CIE 1976

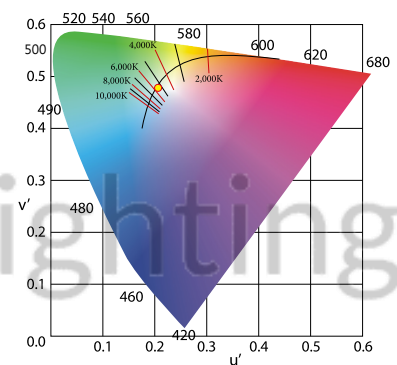

C78.377 - 2017

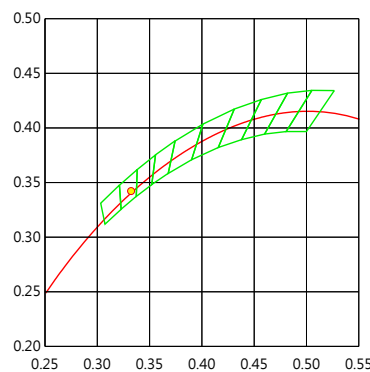

IEC-SDCM

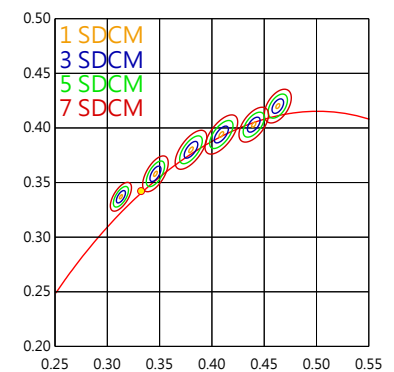

CRI (Re) (R1-R15)

R1	98	R6	97	R11	95
R2	99	R7	99	R12	87
R3	98	R8	99	R13	98
R4	97	R9	96	R14	99
R5	99	R10	99	R15	97

TM-30-15

